

UFP-EDGE TRUE™

Primed, Knotty Trim & Fascia

True finger-jointed trim is the premier exterior wood trim product on the market. Each of these cedar trim boards is finger-jointed and edge-glued with a high quality exterior adhesive that binds the wood during production. This process enhances the board's performance, especially when a long run is desired. With True finger-jointed boards, there's no need to worry about warping, cupping or twisting.


Boards are available with small tight knots, which offers the ultimate appearance. True's first primer coat is an absorbing tannin blocker, while the second coat is fortified using a durable, non-blocking PPG acrylic primer that prepares the surface on all sides for a superior finish.

FEATURES

- Cedar naturally resists decay and termites
- Finger-jointed and edge-glued for superior stability
- 15-year STK limited warranty against peeling, flaking and chalking

VARIOUS SIZES

16-ft and 20-ft lengths 1x3 – 1x12 inch | 2x4 – 2x12 inch | 5/4x3 – 5/4x12 inch

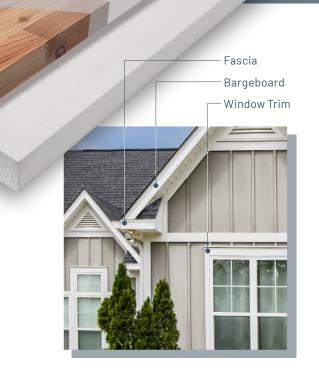



"Educational Features and FAQs"

Frequently Asked Questions:

1. Is Edge True treated?

No, cedar naturally resists termites and rot, plus Edge True is protected by a high-performance PPG 2-coat latex system. The first coat protects against tannin bleed and the second provides a durable primer coat ready for paint.

2. Is Edge True an engineered product?

Yes, both edge laminated and finger-jointed for stability and the best usable lengths.

3. Do you need to seal end cuts in the field while installing?

Yes. Prime all cut ends and any areas were the primer has been damaged with PPG's Seal Grip primer or an equivalent high-quality tannin blocking primer. Product must be finish coated on all 6 sides within 90 days of purchase with a high-quality exterior latex topcoat.

4. Is Edge True Reversible?

Yes, we grade to the resawn face, but also have sanded the smooth side for the most versatile board in the industry.

5. What are the exceptions to the limited warranty?

As a natural product, our warranty does not cover natural occurrences such as extractive bleeding knot bleeding, variations in grain and color, knots, mineral streaks, and pitch pockets.

6. What fastener types are recommended?

Stainless steel nails are the best choice, especially if the trim is to be finished with transparent, semitransparent stain, or bleaching oil. Use No. 304 stainless fasteners for general applications and No. 316 for seacoast exposures.

Hot-dipped galvanized as per ASTM A-153, aluminum and stainless steel fasteners are all corrosion-resistant and all can be used to fasten Cedar. Other types of fasteners (including electroplated and mechanically galvanized) are not recommended. They can rust and disintegrate and react adversely with the natural preservative present in cedar, resulting in stains and streaks. For best result use "splitless" ring shank siding nails. These nails have thin shanks and blunt points to reduce splitting. Textured heads should be used to reduce the glossy appearance of the nail head.



View Edge True™ Trim and Fascia online. Scan the QR code with your smartphone.

ufp**EDGE.com**







